



### Features

- Tight DC breakdown voltage during millions of discharges
- Operation at  $-65^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  with minimal change of DC breakdown
- Rugged Kovar and borosilicate glass construction
- Mil-Std shock and vibration certified
- Hermetically sealed design provides maximum integrity under extreme environmental conditions

### Applications

- Ignition systems for aircraft starting cycle for capacitor discharge type exciters
- Gas fired igniters for commercial and industrial furnaces
- Pulse generators for single pulse and cycle timed applications
- Capacitor discharge ignition systems for jet engines
- Energy transfer for LASER applications

### Standard Voltages

Series	DC Breakdown Voltage (Nom)	Unit
SIG	2.0	kV
	3.0	kV
	4.0	kV

Devices in the SIG Series with other breakdown voltages are available upon request.

### Description

The Spark Igniter Gap (SIG) Series of hermetically sealed gas discharge tubes are made for extended life applications where high reliability of constant breakdown voltage is needed. Special materials have been used for enhanced electron emission to provide millions of discharges with DC breakdown remaining within tight rated limits. Spark gaps with DC breakdown voltage in the range of 2.0 - 4.0kV are standard. All devices are bipolar and mounting in either direction is optional.

### Ordering Information

A complete part number is represented by the digits below. Breakdown voltages are expressed in kV. Examples:

SIG2.0-10 is a 2kV SIG series device with outline 1 and threaded recess terminations on both ends.  
 SIG3.0-11 is a 3kV SIG series device with outline 1 and anode cap and threaded recess terminations.  
 SIG4.0-12 is a 4kV SIG series device with outline 1 and anode cap terminations on both ends.

Product Series/ Part Number	Breakdown Voltage	Outline	Termination Option
SIGX.X-YZ	2.0 – 4.0kV	1	0, 1, 2

#### Termination Options:

- 0: Threaded recess
- 1: One anode cap;  
One threaded recess
- 2: Two anode caps

All spark gaps are available with a .360 O.D. x .406 long end caps and/or #6 – 32 x .375 max threaded recess.

**Specifications (@ 25°C)**


Parameter	Conditions	Symbol	SIG2.0			SIG3.0			Units
			Min	Nom	Max	Min	Nom	Max	
<b>Device Specifications</b>									
DC Breakdown	100V/s	VBD	1.8	2.0	2.2	2.7	3.0	3.3	kV
Impulse Breakdown	7.0kV/μs	Vbd			5.0			5.0	kV
Insulation Resistance	100Vdc	IR	1,000			1,000			MΩ
Capacitance	1MHz	C			4			4	pF
<b>Life Ratings</b>									
Number of Life Shots	2.4mC/shot	N		1 x 10 <sup>7</sup>			1 x 10 <sup>7</sup>		Shots
Cumulative Charge Transfer During Life	3.6 Joules @ 3 pps	Q		24,000			24,000		Coulombs
<b>Environmental Ratings</b>									
Parameter		Test Specifications							
Shock Mil-Std-202		Test at 30 g's, 11ms half sine waveform Method 213, Condition J							
Vibration Mil-Std-202		Test at 10g's at 10-500Hz Method 204, Condition A							
High and Low Temperature		Test at -65°C to +125°C for normal pulse life operation for 96 hours with DC breakdown contained within specified limits							

**Specifications (@ 25°C)**

Parameter	Conditions	Symbol	SIG4.0			Units
			Min	Nom	Max	
DC Breakdown	100V/s	VBD	3.6	4.0	4.4	kV
Impulse Breakdown	7.0kV/μs	Vbd			5.0	kV
Insulation Resistance	100Vdc	IR	1,000			MΩ
Capacitance	1MHz	C			4	pF
<b>Life Ratings</b>						
Number of Life Shots	2.4mC/shot	N		1 x 10 <sup>7</sup>		Shots
Cumulative Charge Transfer During Life	3.6 Joules @ 3 pps	Q		24,000		Coulombs
<b>Environmental Ratings</b>						
Parameter		Test Specifications				
Shock Mil-Std-202		Test at 30 g's, 11ms half sine waveform Method 213, Condition J				
Vibration Mil-Std-202		Test at 10g's at 10-500Hz Method 204, Condition A				
High and Low Temperature		Test at -65°C to +125°C for normal pulse life operation for 96 hours with DC breakdown contained within specified limits				

Figure 1

### DC Breakdown as a Function of the Number of Operations SIG Series Spark Gap vs. Traditional Pure Tungsten Spark Gap

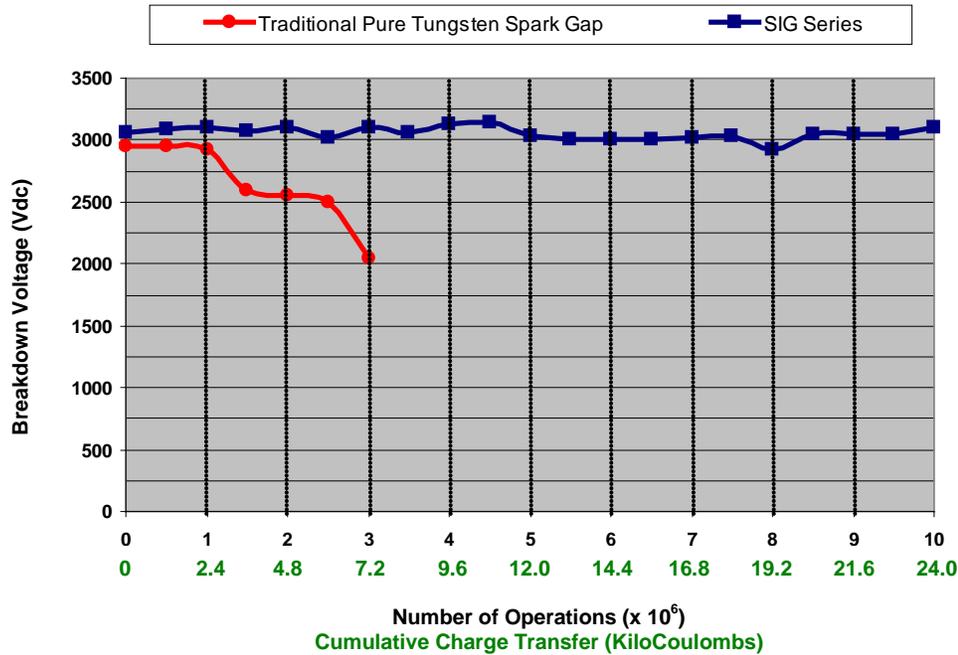


**Note:**

All spark gaps have been operated at energy levels of 3.6 Joules at 3 pps under 1/3 on/off cycle conditions.


- The SIG Series Spark Gap was operated for 10 million shots with a total charge transfer of 24,000 coulombs. The breakdown voltage remained relatively constant at 3,000V and the insulation resistance measured greater than 1,000 MΩ.
- The Traditional Spark Gap (using the SIG Series configuration and pure Tungsten electrodes) was removed from test after operation of three (3) million shots with a total charge transfer of 7,200 coulombs due to rapid drop in DC breakdown voltage and IR levels less than 1,000 MΩ.

**MECHANICAL DIMENSIONS**  
mm (inches)


**SIGX.X-10**

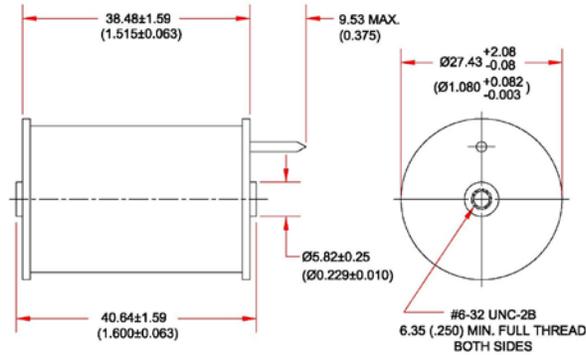

**SIGX.X-11**

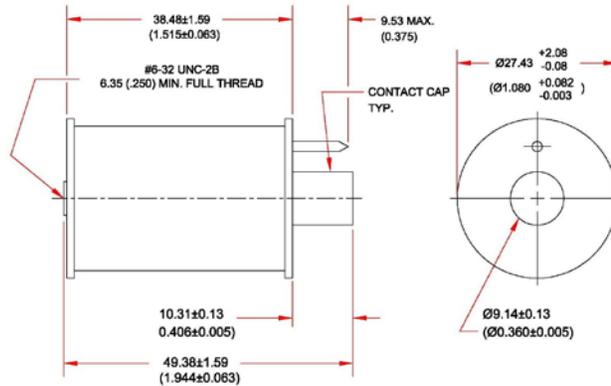

**SIGX.X-12**

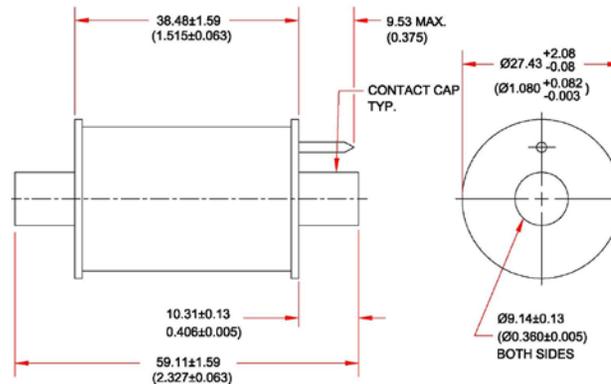

### Contact information:

High Energy Devices, LLC  
26 Hollenberg Court  
Bridgeton, MO 63044  
Tel.: 314.291.0030  
Fax: 314.291.8184  
E-mail: [info@highenergydevices.com](mailto:info@highenergydevices.com)  
[www.highenergydevices.com](http://www.highenergydevices.com)

---

HIGH ENERGY DEVICES, LLC MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NEITHER CIRCUIT PATENT LICENSES NOR INDEMNITY ARE EXPRESSED OR IMPLIED. EXCEPT AS SET FORTH IN HIGH ENERGY DEVICES' STANDARD TERMS AND CONDITIONS OF SALE, HIGH ENERGY DEVICES, LLC ASSUMES NO LIABILITY WHATSOEVER, AND DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT.

THE PRODUCTS DESCRIBED IN THIS DOCUMENT ARE NOT DESIGNED, INTENDED, AUTHORIZED OR WARRANTED FOR USE AS COMPONENTS IN SYSTEMS INTENDED FOR SURGICAL IMPLANT INTO THE BODY, OR IN OTHER APPLICATIONS INTENDED TO SUPPORT OR SUSTAIN LIFE, OR WHERE MALFUNCTION OF HIGH ENERGY DEVICES' PRODUCT MAY RESULT IN DIRECT PHYSICAL HARM, INJURY, OR DEATH TO A PERSON OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. HIGH ENERGY DEVICES, LLC RESERVES THE RIGHT TO DISCONTINUE OR MAKE CHANGES TO ITS PRODUCTS AT ANY TIME WITHOUT NOTICE.

Specification: SIG Series  
©Copyright 2012, High Energy Devices, LLC  
All rights reserved. Printed in USA.  
February 2012